



---

导 辊 产 品 全 配 套 供 应 商  
COMPREHENSIVE SUPPLIER

导 辊 产 品 解 决 方 案 服 务 商  
SOLUTIONS FOR ROLLER





# GUANGTAI CHINESE ROLLER R&D CENTER 广泰科技-导辊产品研发中心

行业：纺织印染、洗涤、造纸、塑料薄膜、电池、碳纤维、非织造

Application: Textile&Dyeing、Cleaning、Paper Making、  
Plastic Firm、Battery&power storage、Carbon Fiber& Non-woven.

## 目录 CONTENTS

04-05  
企业概况  
Company Profile

08-09  
企业荣誉  
Company Honors

10-11  
加工能力  
Process Capacity

13-26  
纺织印染导辊  
Rollers for Textile

27-32  
洗涤行业导辊  
Rollers for Laundry



COMPANY PROFILE  
企业概况



山东广泰环保科技有限公司是中国导辊产品大型制造基地，是专业从事导辊产品研发的高新技术企业。广泰科技拥有专业的研发团队，自主研发了导辊产品的自动化生产流水线及独特的生产工艺，通过全球创新能力布局，成为中国纺织机械行业“导辊产品研发中心”，并主导修订《扩幅装置》等行业标准，引领中国制辊行业发展。

Guangtai is a manufacturer of custom composite rollers & cylinders. With more than 10 years R&D experience, Guangtai became a comprehensive supplier and solutions for roller. It revised the Industry Standard of Spreading Device and was certified as the "Chinese Roller R&D Center" by CTMA(China Textile Machinery Association).



诚实守信 责任担当 创新引领 合作共识

CREDIBILITY RESPONSIBILITY INNOVATION COOPERATION

以品质理念为主导

追求卓越专注细节

铸就广泰导辊精品品牌

引领导辊行业持续创新发展

成为导辊产品解决方案服务商



中华人民共和国纺织行业标准

FZ

FZ/T 92059—2023  
代替 FZ/T 92059—2011

扩幅装置

Spreading device

EDITOR IN CHIEF/  
PARTICIPANT STANDARD

主编/参编标准

7+

- 1.主导修订《扩幅装置》行业标准
- 2.主导修订《普通轧车用不锈钢轧辊》行业标准
- 3.参与制订《纺织装备互联互通与互操作 第3部分：化纤》国家标准
- 4.参与制订《剪毛机》行业标准
- 5.参与修订《材料在图样及设计文件中的标记方法》行业标准
- 6.参与修订《松式烘干机》行业标准
- 7.参与修订《普通轧车》行业标准

- 1.Editor in chief of Spreading device
- 2.Editor in chief of Padder-Stainless steel bowl
- 3.Participant of Interconnection and interoperation for textile equipment —Part 3: Chemical fiber
4. Participant of Shearing machine
5. Participant of Marking method of materials in drawings and design documents
6. Participant of Relaxation dryer
7. Participant of Padder



CHINA NATIONAL INTELLECTUAL  
PROPERTY ADMINISTRATION  
中华人民共和国国家知识产权局

130+

32 发明专利  
INVENTION PATENT

82 实用新型专利  
UTILITY MODEL PATENT

17 外观设计专利  
INDUSTRIAL DESIGN

4 PCT国际专利  
PCT INTERNATIONAL PATENT





# COMPANY HONORS


## 企业荣誉

- 01、导辊产品研发中心
- 02、高新技术企业
- 03、国家科技型中小企业
- 04、国家知识产权优势企业
- 05、山东省“专精特新”中小企业
- 06、纺织行业开发贡献奖
- 07、中国纺织工业联合会“专精特新”中小企业
- 08、烟台市工业企业“一企一技术”研发中心
- 09、烟台市科技型中小企业
- 10、烟台市知识产权优势企业
- 11、烟台市瞪羚企业
- 12、烟台市“专精特新”中小企业
- 13、烟台市工业企业设计中心
- 14、烟台市高成长高质量企业入库
- 15、蓬莱市科学技术进步奖
- 16、ISO9001:2015 质量管理体系认证
- 17、GB/T29490-2013 知识产权管理体系认证
- 18、安全生产双体系认证
- 19、ISO14001:2015 环境管理体系认证
- 20、ISO45001:2018 职业健康安全管理体系认证
- 21、安全生产标准化三级企业认证

.....





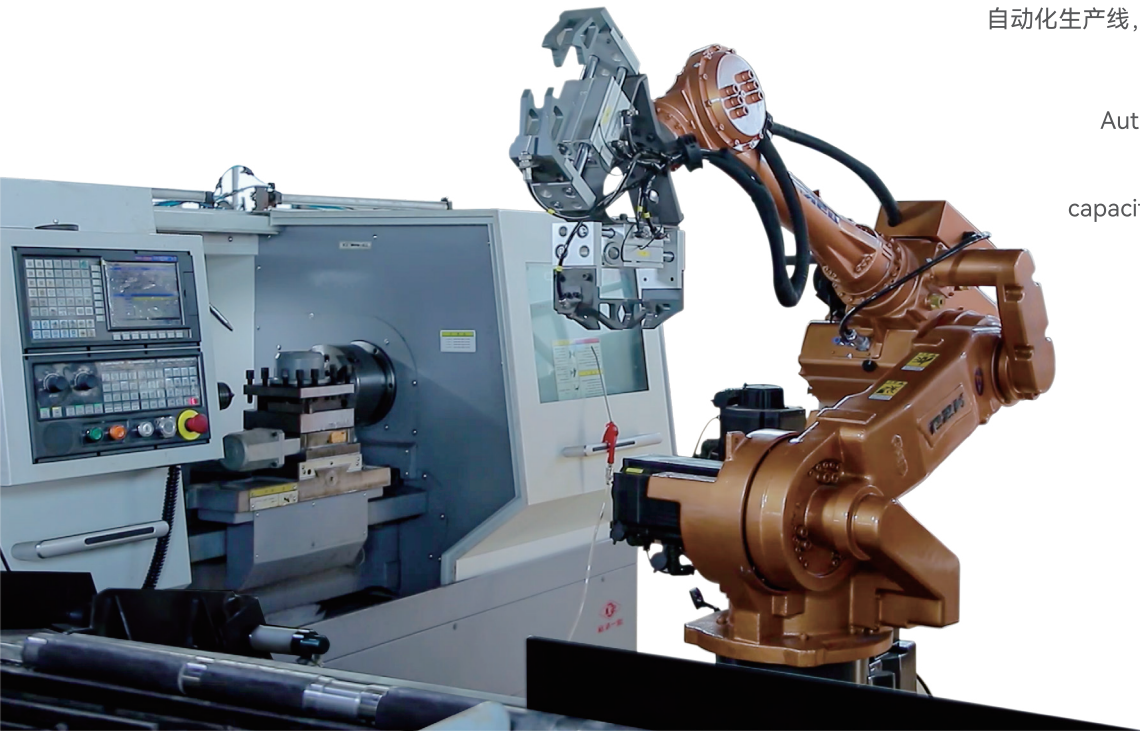


车床/机器人:

自动化生产线，年生产能力**20万**根。

Lathe & Robot :  
Automatic production line,  
annual production  
capacity of **200,000** rollers.

年产/根  
**200,000**  
ANNUAL  
OUTPUT

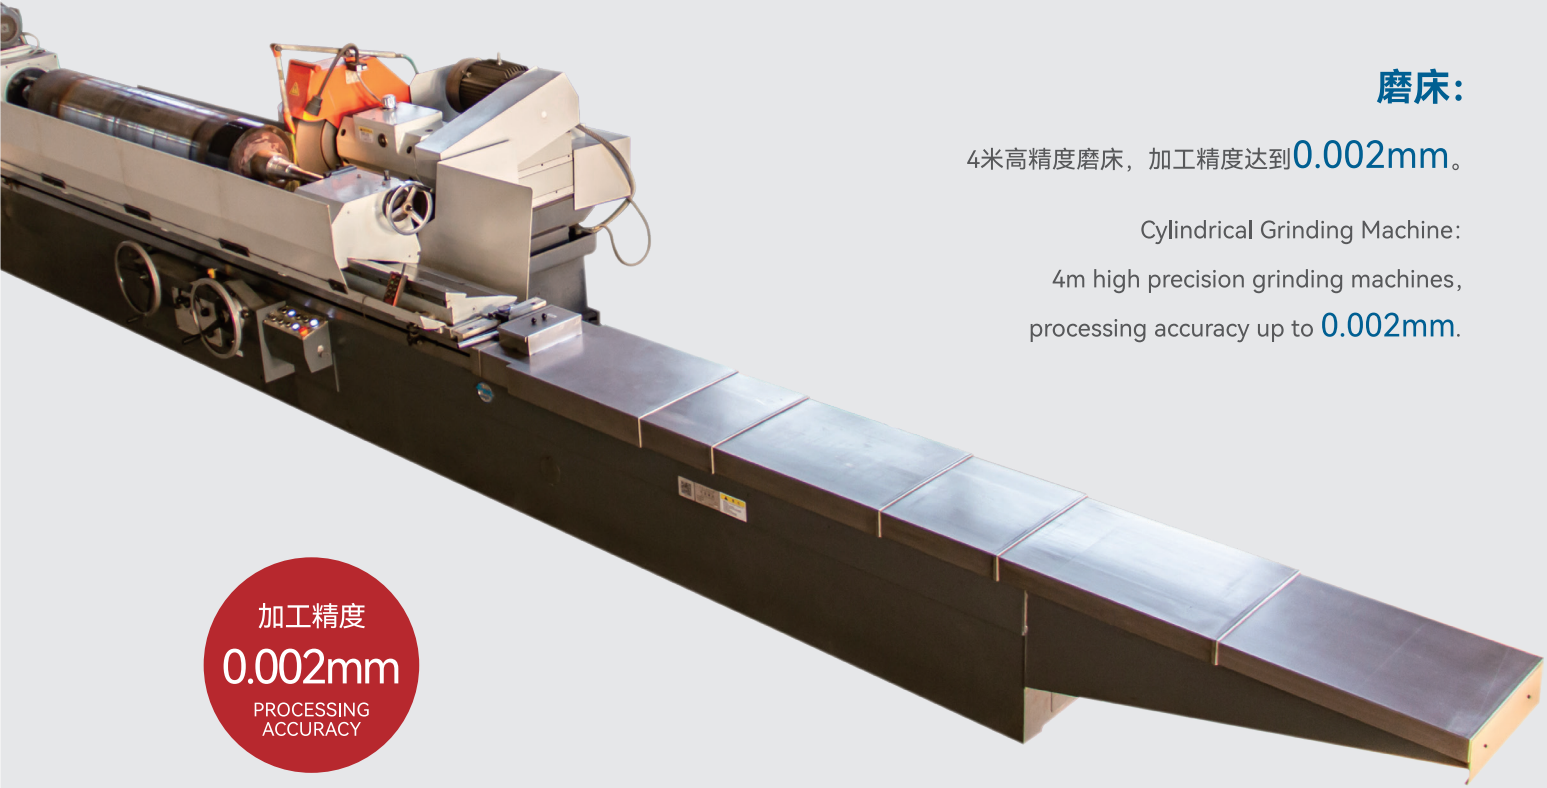


磨床:

4米高精度磨床，加工精度达到**0.002mm**。

Cylindrical Grinding Machine:  
4m high precision grinding machines,  
processing accuracy up to **0.002mm**.

加工精度  
**0.002mm**  
PROCESSING  
ACCURACY

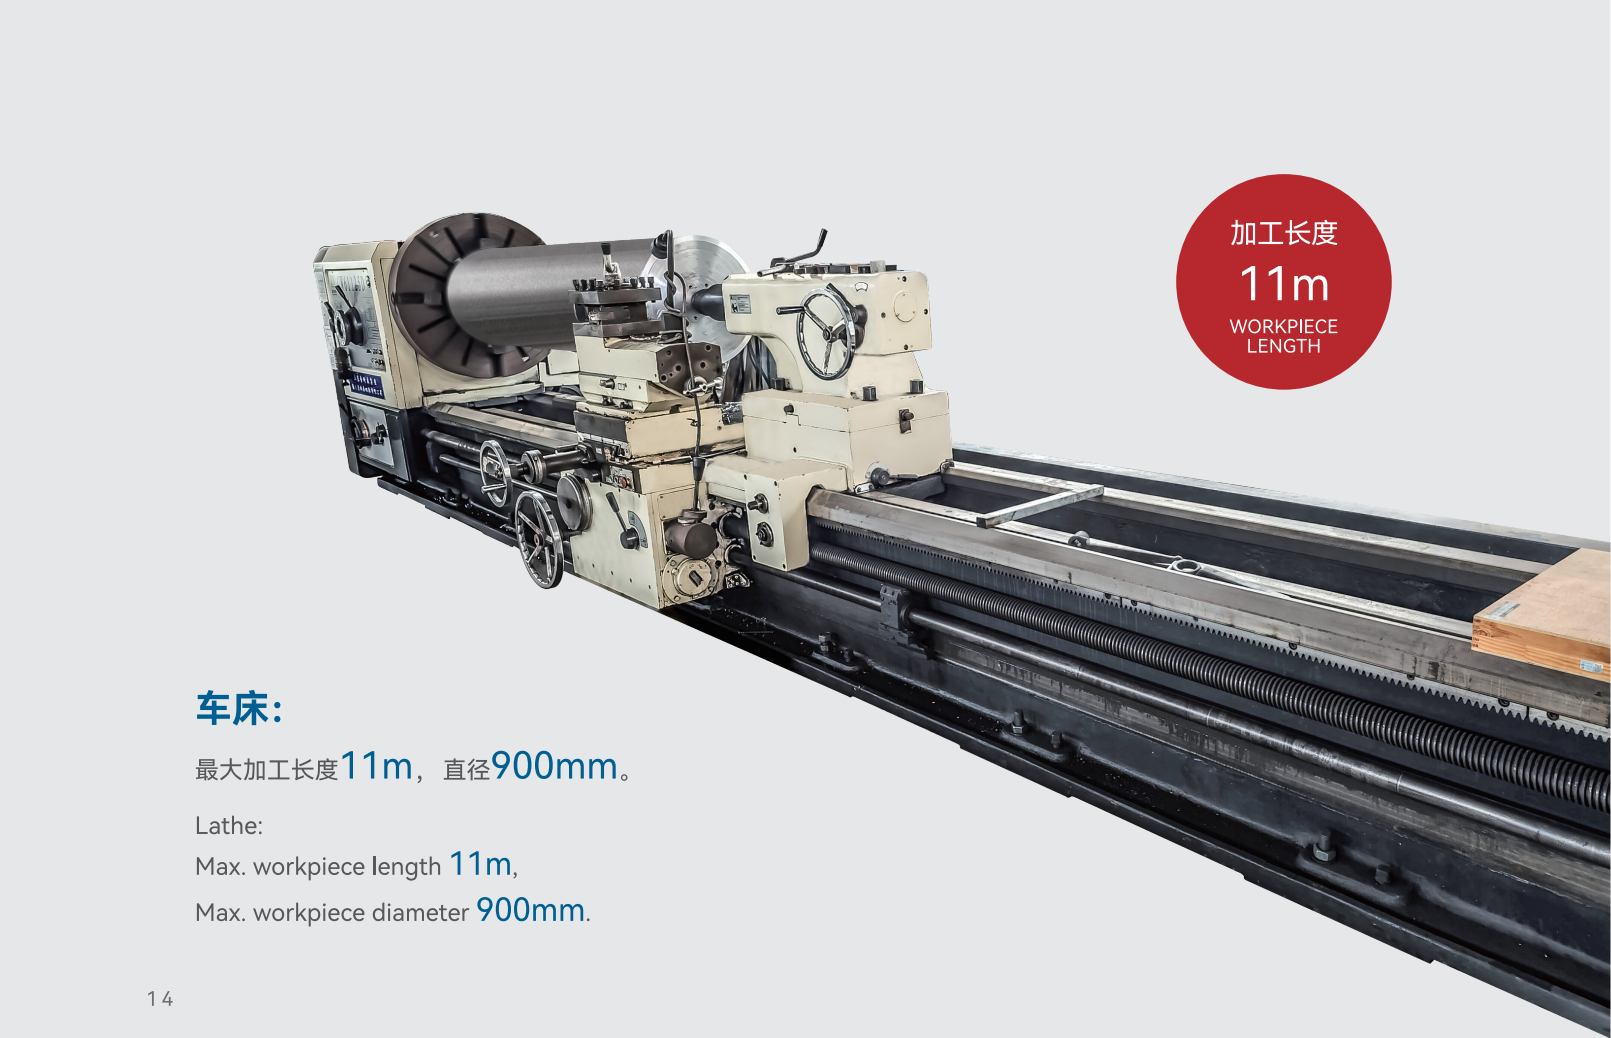

加工长度  
**11m**  
WORKPIECE  
LENGTH

车床:

最大加工长度**11m**，直径**900mm**。

Lathe:  
Max. workpiece length **11m**,  
Max. workpiece diameter **900mm**.



**检测:** 超声探伤仪、粗糙度检测仪，硬度计，涂层测厚仪，电火花检测仪等多种检测设备，保证产品质量。

Testing: Ultrasonic flaw detector, roughness tester, hardness tester, coating thickness tester, high voltage porosity detector and other testing equipment to ensure product quality.



以创新传递智慧

以品质分享价值

全球体验成为广泰的核心价值观

铸造战略合作利益共享的商业信仰

成为国际上有影响力的

导辊产品全配套供应商



纺织印染导辊

ROLLERS FOR TEXTILE



产品特点:

- 1、生产效率高。
- 2、壁厚均匀，平衡性能好。
- 3、相对比电镀更加环保，表面耐腐蚀性强。

Product features:

- 1.High production efficiency .
- 2.Small wall thickness tolerance, good balance performance.
- 3.More environmentally friendly than electroplating, with strong surface corrosion resistance.

COMPOSITE ROLLER  
不锈钢复合导布辊



导布辊系列参数 Parameters


|                     |    |    |    |    |     |     |     |     |     |     |     |
|---------------------|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|
| 直径 (mm)<br>Diameter | 50 | 60 | 76 | 90 | 102 | 115 | 125 | 150 | 180 | 200 | 220 |
|---------------------|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|

|                       |      |  |  |      |  |  |      |  |  |
|-----------------------|------|--|--|------|--|--|------|--|--|
| 等级<br>Quality Grade   | R1   |  |  | R2   |  |  | R3   |  |  |
| 粗糙度 (Ra)<br>Roughness | 0.80 |  |  | 0.40 |  |  | 0.20 |  |  |

|                                   | 等级<br>Quality Grade | 公称宽度(mm) Nominal Width |            |            |            |            |            |            |            |
|-----------------------------------|---------------------|------------------------|------------|------------|------------|------------|------------|------------|------------|
|                                   |                     | 1200-1600              | >1600-2000 | >2000-2800 | >2800-3600 | >3600-4400 | >4400-5200 | >5200-6000 | >6000-6800 |
| 跳动 (mm)<br>Runout Tolerance Value | C1                  | 0.25                   | 0.30       | 0.35       | 0.40       | 0.60       | 0.70       | 0.80       | 0.90       |
|                                   | C2                  | 0.20                   | 0.25       | 0.30       | 0.35       | 0.50       | 0.60       | 0.70       | 0.80       |
|                                   | C3                  | 0.15                   | 0.20       | 0.25       | 0.30       | 0.40       | 0.50       | 0.60       | 0.70       |

EXTRA-LONG  
COMPOSITE ROLLER  
超长复合导布辊

12+  
METRES

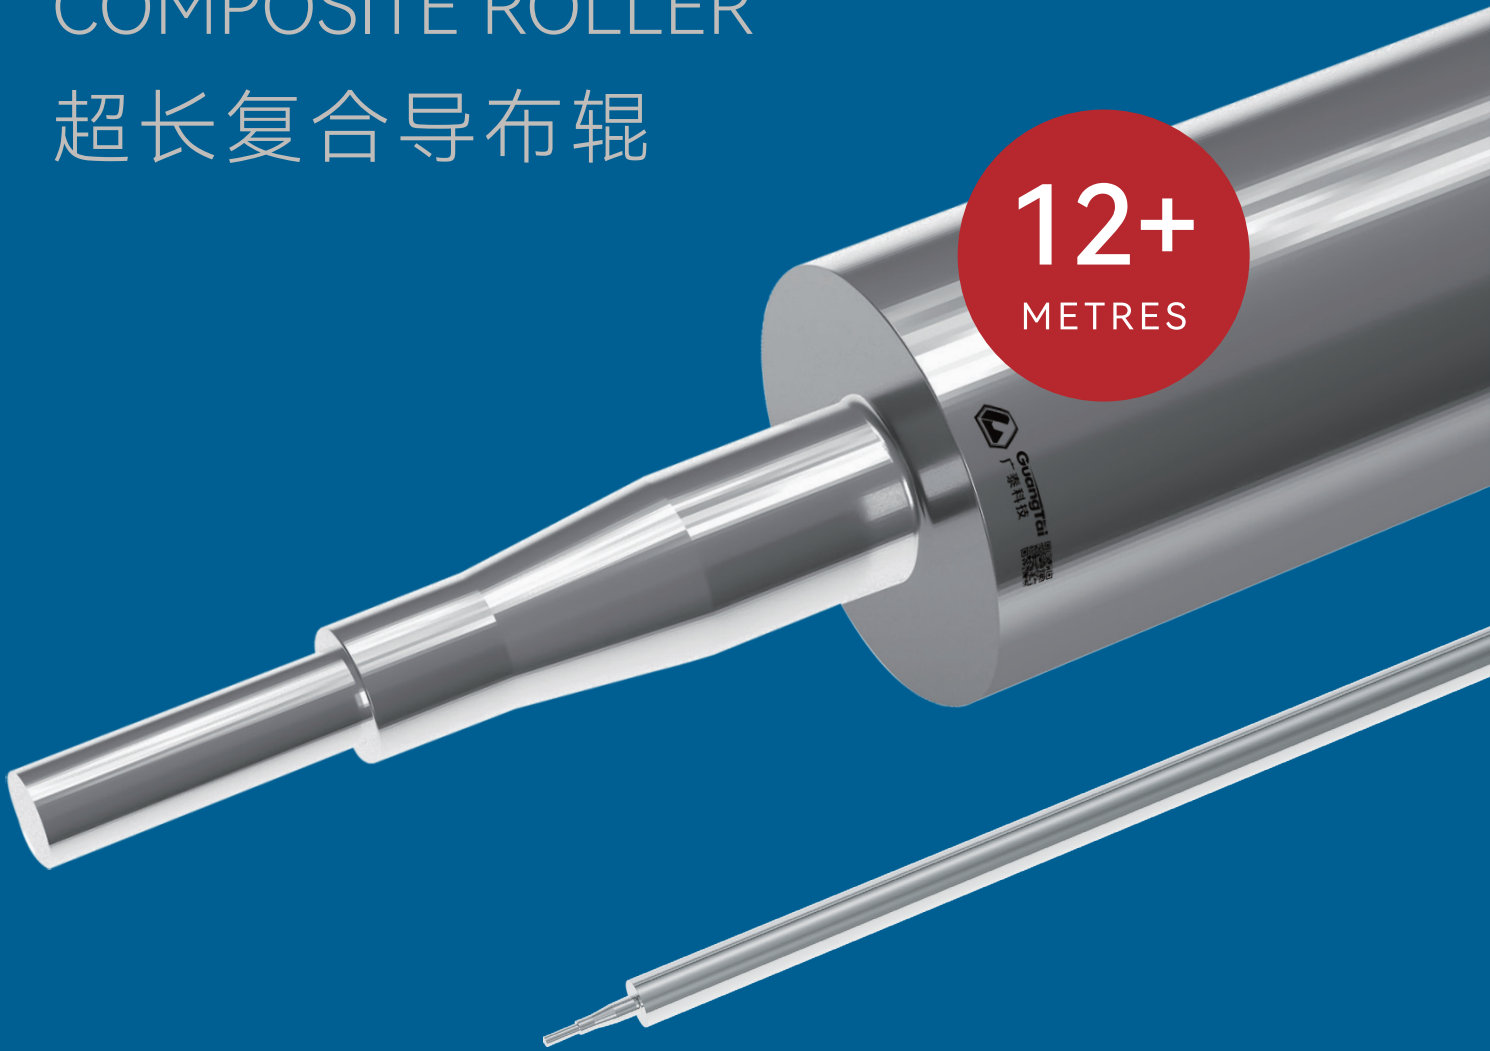

产品特点:

- 1、最长可达12米以上。
- 2、辊体采用特殊工艺，重量轻，低耗节能并能达到减少布料张力的导布效果。
- 3、辊体跳动小，精度高，平衡性能好。
- 4、适用于地毯、无纺布、壁纸、铺地材料、塑料机械等宽幅设备，通过中国纺织机械联合会科技成果鉴定，达到国际先进水平。

Product features:

- 1.The roller can be up to 12 meters long.
- 2.The roller body has advantages on light weight, and energy saving, which can reduce fabric tension.
- 3.The roller body has small runout, high precision and good balance performance.
- 4.Extra-long composite Roller suitable for carpet, non-woven fabric, wallpaper, paving material, plastic machinery and other wide-width equipment. It passed science and technology achievement appraisal by CTMA(China Textile Machinery Association). Its technical performance reached the international advanced level.



FIXED SHAFT ROLLER  
固定轴式导布辊（活络辊）




产品特点:


- 1、平衡性能好、运转灵活、稳定性好，光洁度高。
- 2、芯轴、轴承、密封等内部结构采用广泰专用工艺。
- 3、轴承外可采用油封结构，满足防尘、防水、防腐要求。

Product features:

- 1. Good balance performance, flexible rotation and high surface finish.
- 2. Shaft, bearing, seal and other internal structures adopt Guangtai's special technology.
- 3. Oil seal structure can be used to meet the requirements of dustproof, waterproof and anti-corrosion.

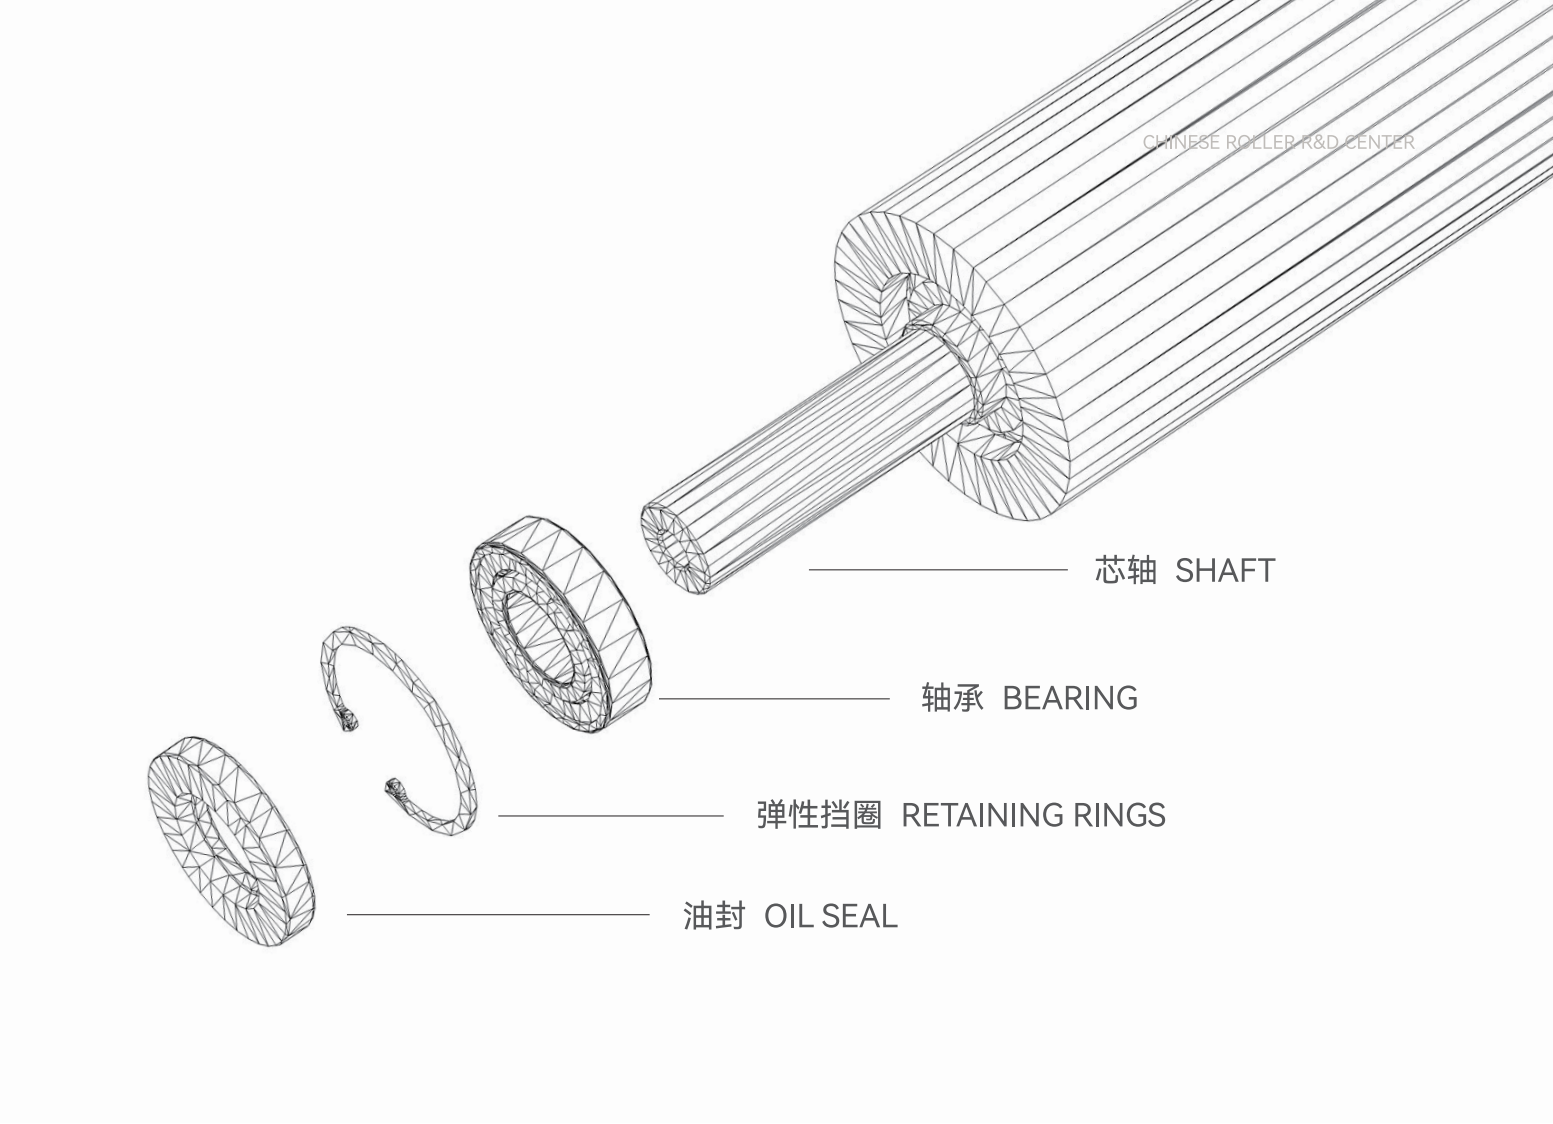

固定轴式导布辊细节图  
STRUCTURE OF  
FIXED SHAFT ROLLER

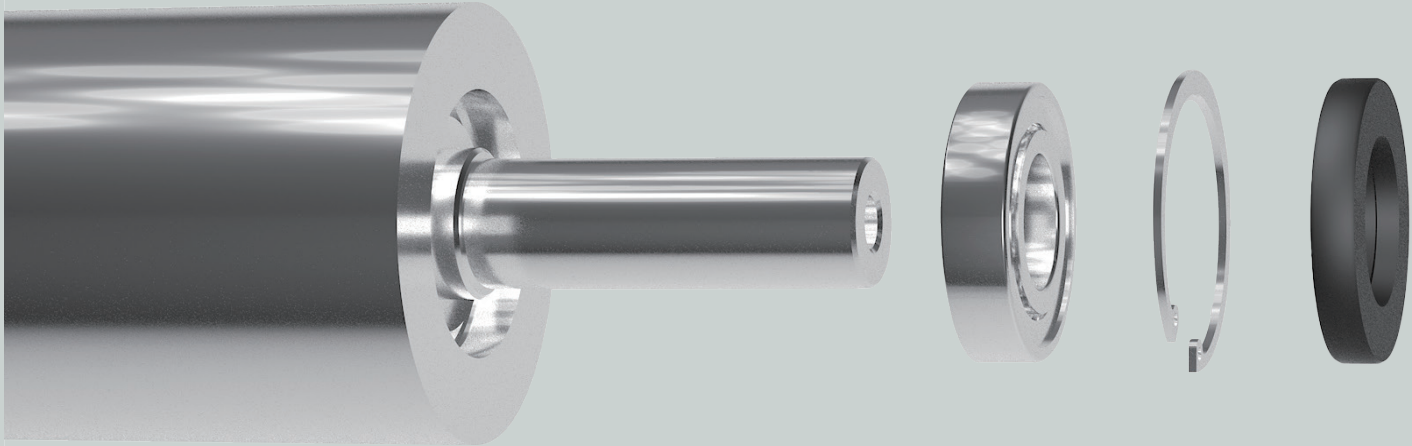




扩幅辊系列参数 Parameters

|                                         |                        |                           |            |            |            |            |            |            |            |     |
|-----------------------------------------|------------------------|---------------------------|------------|------------|------------|------------|------------|------------|------------|-----|
| 辊体直径 (mm)<br>Roll Diameter              | 50                     | 60                        | 76         | 90         | 102        | 115        | 125        | 150        | 180        | 200 |
|                                         |                        |                           |            |            |            |            |            |            |            |     |
| 螺纹头数 (mm)<br>Number of wires            | 2                      | 3                         | 4          | 4          | 6          | 8          | 10         | 12         |            |     |
|                                         |                        |                           |            |            |            |            |            |            |            |     |
| 螺纹导程 (mm)<br>Lead                       | 24                     | 32                        | 36         | 40         | 48         | 64         | 72         | 80         | 96         | 128 |
|                                         |                        |                           |            |            |            |            |            |            |            |     |
| 等级<br>Quality Grade                     | R1                     |                           |            | R2         |            |            | R3         |            |            |     |
| 粗糙度 (Ra)<br>Roughness                   | 0.80                   |                           |            | 0.40       |            |            | 0.20       |            |            |     |
|                                         |                        |                           |            |            |            |            |            |            |            |     |
| 公称宽度(mm)    Nominal Width               |                        |                           |            | 1200-3600  |            |            | >3600-6800 |            |            |     |
| 平衡等级<br>Quality Grade                   |                        |                           | U1         | G16        |            |            | G40        |            |            |     |
|                                         |                        |                           | U2         | G6.3       |            |            | G16        |            |            |     |
|                                         |                        |                           | U3         | G2.5       |            |            | G6.3       |            |            |     |
|                                         |                        |                           |            |            |            |            |            |            |            |     |
| 跳动 (mm)<br>Runout<br>Tolerance<br>Value | 等级<br>Quality<br>Grade | 公称宽度(mm)    Nominal Width |            |            |            |            |            |            |            |     |
|                                         |                        | 1200-1600                 | >1600-2000 | >2000-2800 | >2800-3600 | >3600-4400 | >4400-5200 | >5200-6000 | >6000-6800 |     |
|                                         | C1                     | 0.25                      | 0.30       | 0.35       | 0.40       | 0.60       | 0.70       | 0.80       | 0.90       |     |
|                                         | C2                     | 0.20                      | 0.25       | 0.30       | 0.35       | 0.50       | 0.60       | 0.70       | 0.80       |     |
|                                         | C3                     | 0.15                      | 0.20       | 0.25       | 0.30       | 0.40       | 0.50       | 0.60       | 0.70       |     |

SEMICIRCULAR WIRE  
SPREADER ROLLER  
半圆丝扩幅辊

产品特点:


- 1、半圆丝的底部结构与辊体紧密结合，有效解决滑丝问题。
- 2、半圆丝侧面与辊体结合无缝隙，不容易塞油污、灰尘等，保持辊体清洁，有效保护织物。
- 3、半圆丝侧面垂直结构，有效提高展布能力。
- 4、半圆丝的顶部结构与织物平滑接触，避免损伤织物。




Product features:

- 1.All-purpose products, it can be used for various fabric.
- 2.The bottom structure of semicircular wire is tightly wrapped around roller, which effectively prevent wire displacement.
- 3.The side of the semicircular wire is seamless with the roller, no residual soiling, dust, etc., keep the roller clean and protect the fabric.
- 4.The side structure of the semicircular wire is vertical, which effectively improves the spreading capacity.
- 5.The top structure of the semicircular wire has a rounded transition to avoid damaging the fabric.


扩幅辊通用接头方式

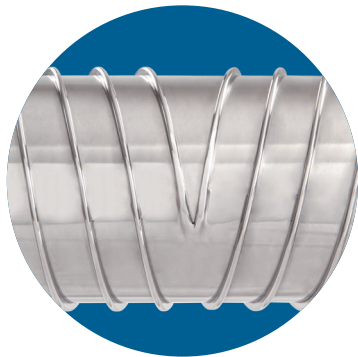

V型

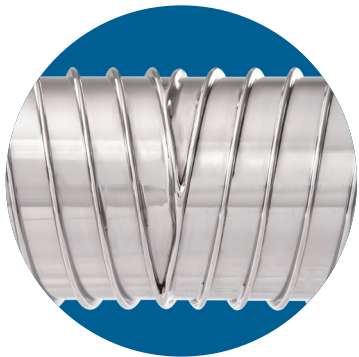

Y型

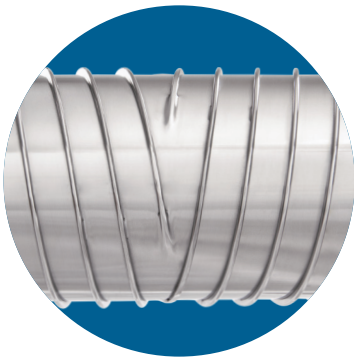


半Y型





T-WIRE SPREADER ROLLER

T型丝扩幅辊



产品特点:

- 1、T型丝的底部结构与辊体紧密结合，彻底解决滑丝问题。
- 2、T型丝侧面与辊体结合无缝隙，不容易塞油污、灰尘等，保持辊体清洁，有效保护织物。
- 3、T型丝侧面垂直结构及高度，达到很强的展布能力。
- 4、T型丝的顶部结构与织物平滑接触，避免损伤织物。

Product features:

- 1. It is applicable to heavy fabrics, such as blankets , as well as other fabrics requiring strong spreading capacity.
- 2. The bottom structure of T-wire is tightly wrapped around roller, which effectively prevent wire displacement.
- 3. The side of the T-wire is seamless with the roller, so as to prevent blockage of oil stain, dust, etc., keep the roller clean and protect the fabric.
- 4. The vertical structure and height of the T-shaped wire achieve strong spreading ability.
- 5. The side of the semicircular wire is smooth finish, so as to avoid damaging the fabric.



TRIANGLE WIRE SPREADER ROLLER

三角扁丝扩幅辊





产品特点:

- 1、三角扁丝的结构特点及绕丝方式有解决超薄超稀及敏感针织织物的刮丝及损伤问题。
- 2、三角扁丝扩幅辊有效解决织物卷边问题。
- 3、三角扁丝扩幅辊的结构特点保证织物更平整，有效解决织物的纵向起皱问题。

Product features:

- 1. The high surface finish of the triangle wire spreader roller effectively prevents damage to sensitive woven and knitted fabrics.
- 2. The triangular wire spreader roller has significant advantages in opening knitted fabrics, especially in the edge of roller.

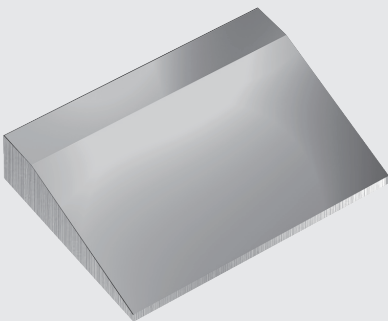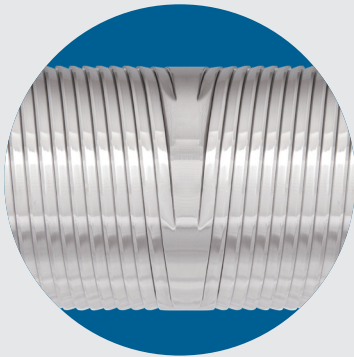




HALF-ROUND WIRE  
SPREADER ROLLER  
大半圆扩幅辊



- 产品特点:
- 1、传统圆丝的替代产品，适用于超薄超稀及敏感针织物，防止勾丝损伤。
  - 2、大半圆丝底部与辊体结合牢固，有效解决滑丝问题。
  - 3、不容易塞油污，灰尘等，保持辊体清洁，有效保护织物。

- Product features:
- 1. Serving as a replacement for traditional round wires, designed for sensitive woven and knitted fabrics.
  - 2. The bottom structure is tightly wrapped around roller, which effectively prevent wire displacement.
  - 3. The side of the wire is seamless with the roller, no residual soiling, dust, etc., keep the roller clean and protect the fabric.

High-Precision Roller  
高精度导辊

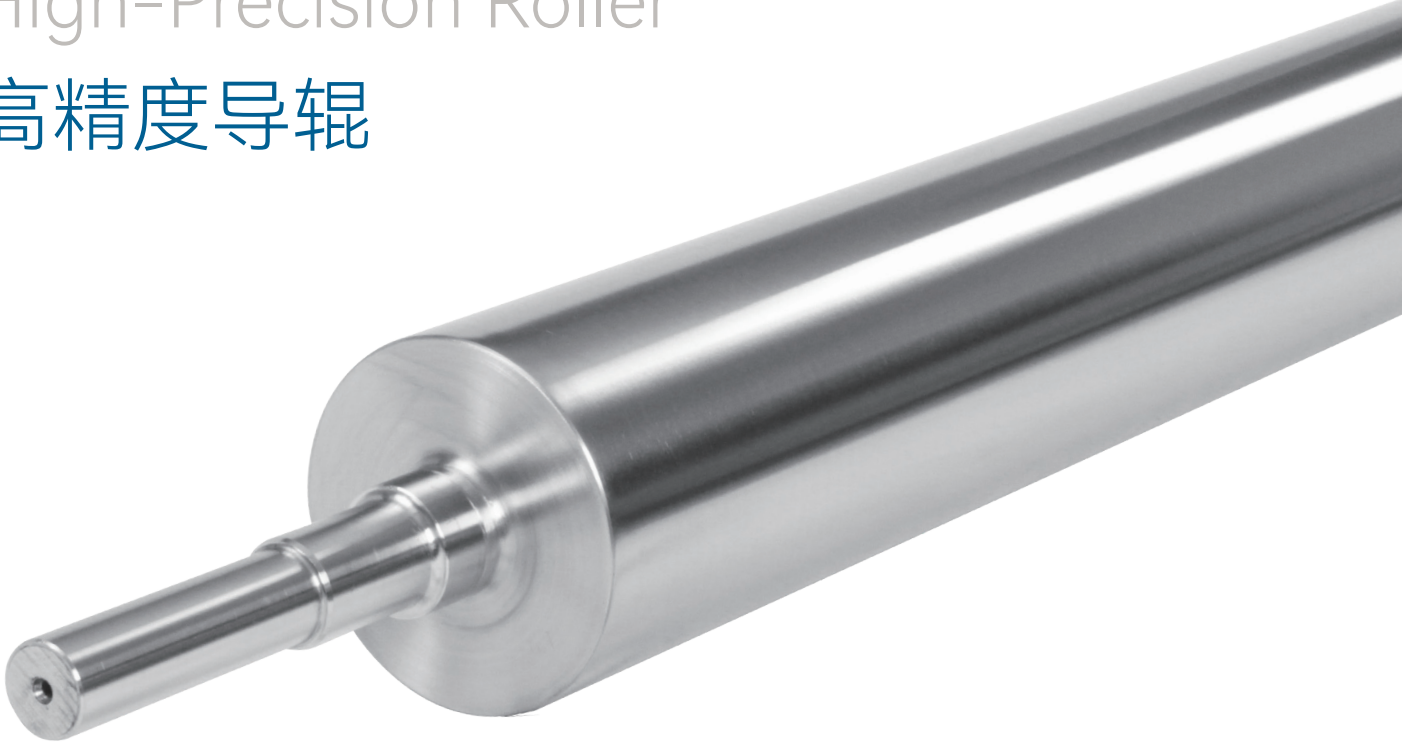

| 技术参数 Parameter     |      |      |      |      |
|--------------------|------|------|------|------|
| 等级 Quality Grade   | Rb   | Rc   | Rd   | Re   |
| 粗糙度 (Ra) Roughness | 0.80 | 0.40 | 0.20 | 0.10 |

- 产品特点:
- 1、精度高，同轴度最高要求可以达到0.02内，导辊布料张力均匀，布料平整，不起褶皱等，能满足高精度导辊的基本要求;
  - 2、光洁度高，粗糙度最底可达到0.05内(达到8K镜面等级)，可适用全领域导辊的粗糙度要求;
  - 3、导辊运转稳定，节能降耗，动平衡等级最高可达G1；可应用在纺织印染，化纤，薄膜等领域。

- Product features:
- 1.High precision, with a total runout accuracy reaching 0.2 mm, ensuring tension distribution across the roller, resulting in flat and wrinkle-free fabrics, thus fulfilling the requirements for high-precision rollers.
  - 2.It features a high degree of smoothness, with the roughness level achieving as low as within 0.05 (equivalent to an 8K mirror finish), making it suitable for all fields that demand stringent roughness standards.
  - 3.The guide roller operates with exceptional stability, promoting energy efficiency. its dynamic balance can reach up to Grade G1, making it applicable in various industries such as textile printing and dyeing, fibers, and film production.



STEAM&WATER  
COOLING CYLINDER  
冷水辊

产品特点:

- 1、冷水辊辊体跳动精度高，全跳动可达0.6mm。
- 2、冷水辊采用双层结构，强度大、重量轻，循环性能好、节能，更适合宽幅设备。
- 3、冷水辊稳定性好，彻底解决长期使用漏水问题。


|                       |                                                                      |
|-----------------------|----------------------------------------------------------------------|
| 公称参数<br>Nominal Width | 2000、2200、2400、2600、2800、3000、3200、<br>3400、3600、3800、4000、4200、4400 |
|-----------------------|----------------------------------------------------------------------|

Product features:

- 1. The roller body has high runout accuracy. The runout can reach 0.6mm.
- 2. The roller adopts a double-layer structure which has high strength, light weight, good cycling performance and energy-saving. So it is more suitable for wide equipment.
- 3. The roller has good stability and solves the problem of water leakage that may occur during long-term use.



MESH ROLLER  
网孔辊

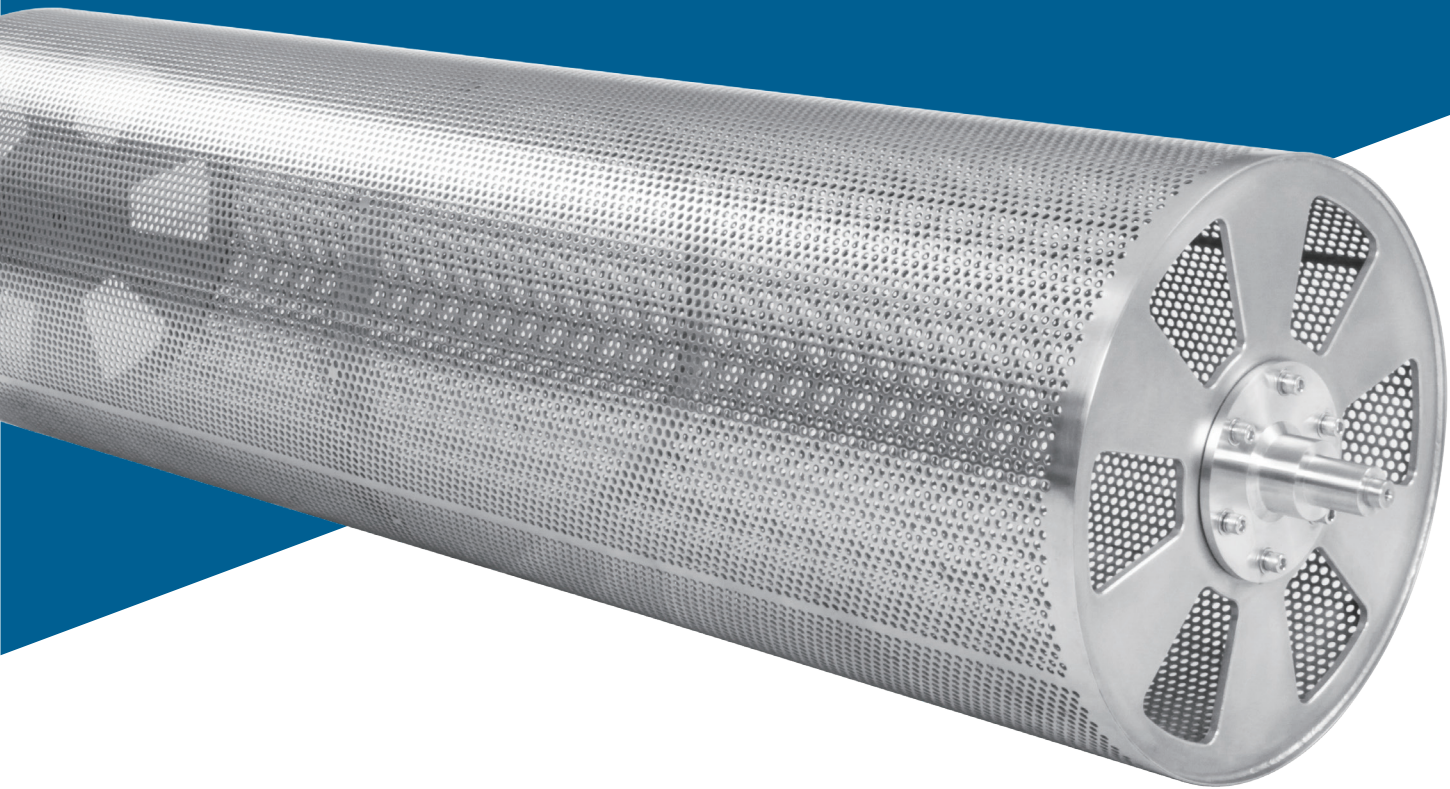


产品特点:

- 辊面光洁度高无毛刺，减少织物摩擦损伤，保持织物柔软光泽。
- 跳动精度可达0.6mm，确保稳定可靠，避免织物褶皱拉伤。


Product features:

- The surface has high smoothness and is free from burrs, minimizing friction and damage to fabrics while maintaining their softness and gloss.
- With a runout accuracy of up to 0.6mm, it ensures stability and reliability, effectively preventing wrinkles and strains on fabrics.





RAISING ROLLER  
起毛辊

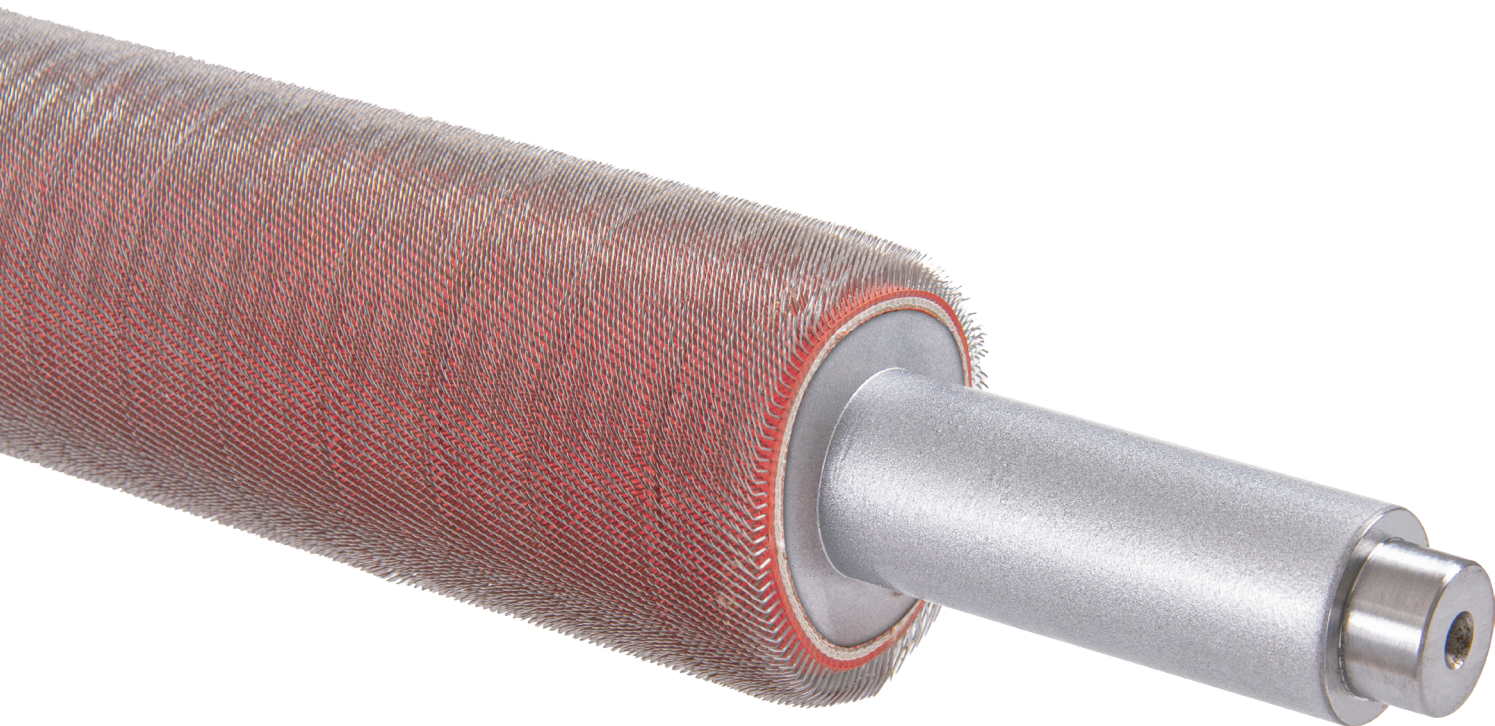

产品特点:

- 1、平衡性能: 1000r/min的剩余不平衡质量可达25g。
- 2、重量公差:  $\pm 0.025\text{kg}$ 。
- 3、跳动: 全跳动可达0.1mm。
- 4、强度: 屈服强度是传统产品1.6倍以上。

Product features:

- 1. Balance: The residual unbalance mass at 1000r/min can reach 25g.
- 2. Weight tolerance:  $\pm 0.025\text{kg}$ .
- 3. The runout can reach 0.1mm.
- 4. Strength: Yield strength is 1.6 times higher than traditional products.

BRUSH/SUEDING ROLLER  
磨毛辊

平衡性能好  
Excellent  
Balance

重量公差小  
Low Weight  
Tolerance

精度高  
High  
Precision





RUBBER ROLLER  
FOR PADDLE  
橡胶轧辊

产品特点:


- 丁腈胶: 优良的耐油性, 而且耐磨、耐老化、耐热性能比较好。
- 天然橡胶: 优异的弹性和机械强度, 较好的耐碱性。
- 三元乙丙胶: 优异的耐臭氧化、耐候性, 耐温范围广, 可在 -65°C-140°C下长期工作, 绝缘性优良。

Product features:

- Nitrile Rubber: Nitrile rubber is most popular for its oil resistance. It's also known for its heat resistance, strength, and resilience..
- Natural Rubber: Excellent elasticity, mechanical strength and alkali resistance.
- EPDM Rubber: EPDM rubber can resist abrasion, UV rays, ozone, aging, and weather, and it's the most waterproof rubber available.
- EPDM is also steam resistant, while functioning well in temperatures from -85degrees F(-65 C) to 284 degrees F(140 C).



STEEL ROLLER  
FOR PADDLE  
不锈钢轧辊

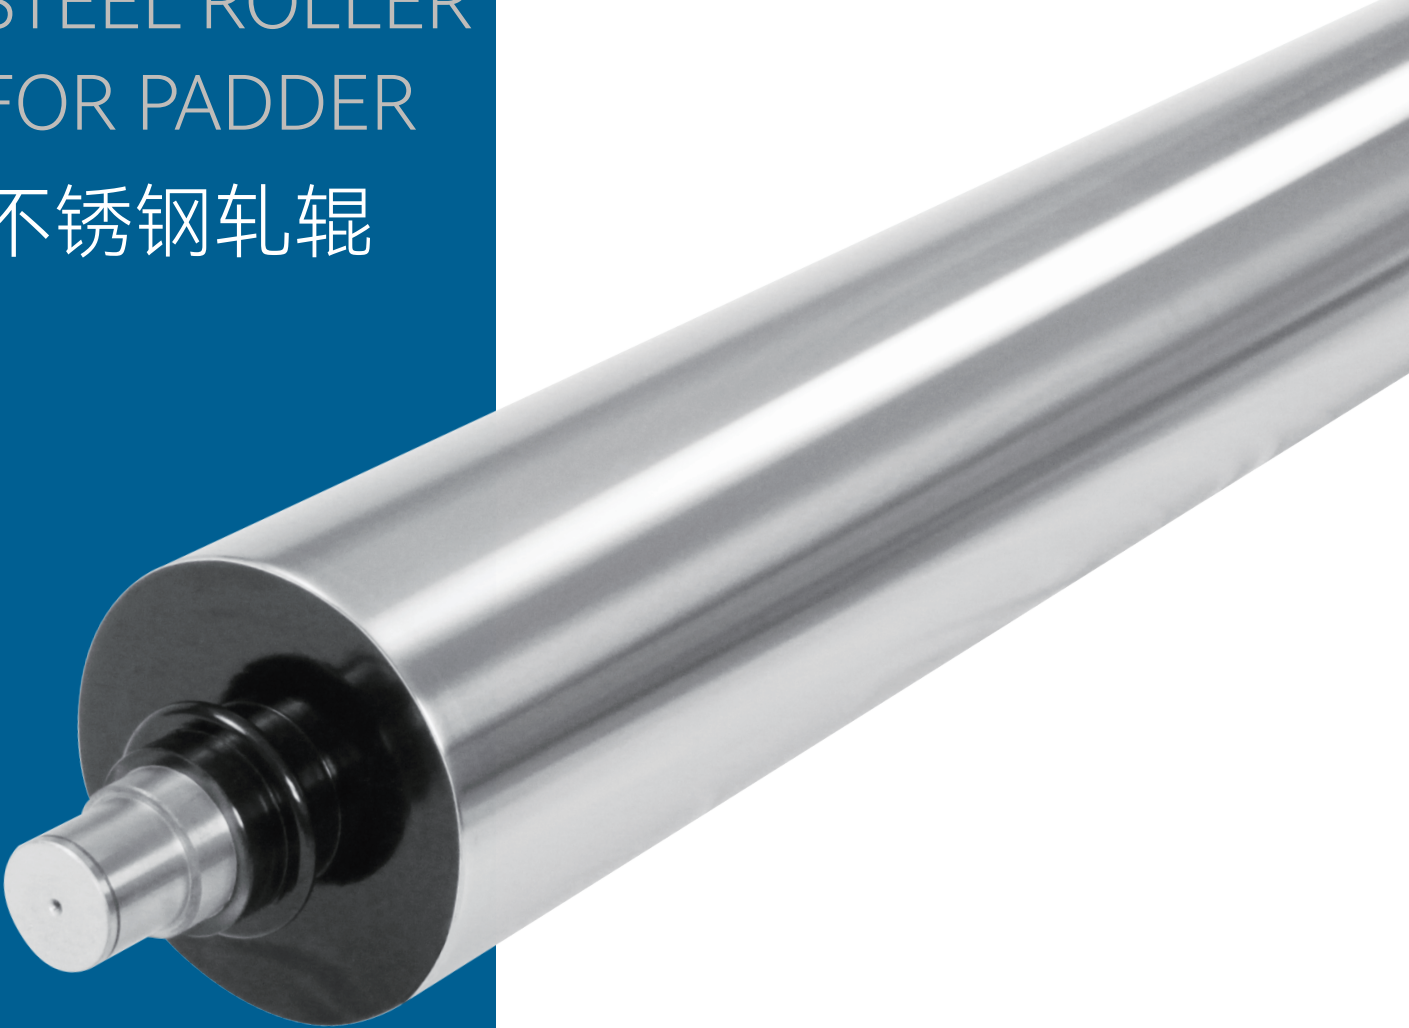



产品特点:

- 1、辊体强度大, 稳定性好, 满足各种工况的压力要求。
- 2、采用广泰专用包覆设备及工艺, 避免了轴头断裂、脱落及辊体不锈钢开裂等问题。

Product features:

- 1. The roller body has high strength and good stability, meeting the pressure requirements of various working conditions.
- 2. Adopting Guangtai's specialized coating equipment and process that avoid problems such as shaft head fracture or detachment and stainless steel cracking of the roller body.

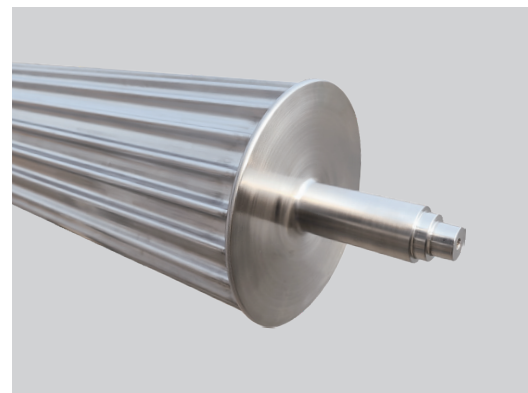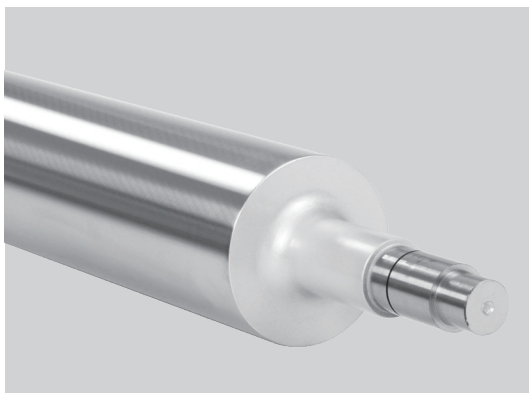

|                                                                                     |                        |                                                                                      |                                |
|-------------------------------------------------------------------------------------|------------------------|--------------------------------------------------------------------------------------|--------------------------------|
|    | 波浪辊<br>Wave Roller     |    | 电镀导辊<br>Chrome Coating Roller  |
|   | 牵引辊<br>Traction Roller |   | 弯辊<br>Bowed Rubber Roller      |
|  | 紧布架<br>Tension Frame   |  | 紧布架<br>Tension Frame           |
|  | 条纹辊<br>Stripe Roller   |  | 特氟龙导辊<br>Teflon Coating Roller |



洗涤行业导辊  
ROLLERS FOR LAUNDRY



COMPOSITE ROLLER  
导带辊

产品特点:

- 1、替代传统喷涂工艺，强度大，精度高，环保节能，使用性能稳定。
- 2、辊体表面采用特殊工艺形成粗糙效果，增加了辊体与烫平带的摩擦力，有效提高传动效率及运转稳定性。

Product features:

- 1.Superior to traditional spray coating methods, this product delivers high strength, precision, eco-friendliness and energy efficiency for stable performance.
- 2.The unique rough texture on the roller surface enhances friction with the belt, boosting transmission efficiency and operational stability.



| 等级 Grade \ 直径 Diameter | Φ50 | Φ60 | Φ76 | Φ90 | Φ102 | Φ115 | Φ125 | Φ150 |
|------------------------|-----|-----|-----|-----|------|------|------|------|
| P                      | ✓   | ✓   | ✓   | ✓   | ✓    | ✓    | ✓    | ✓    |
| Y                      |     | ✓   | ✓   | ✓   | ✓    | ✓    | ✓    | ✓    |
| G                      |     | ✓   | ✓   | ✓   | ✓    | ✓    | ✓    | ✓    |

| 等级 Grade                     | P     | Y     | G     |
|------------------------------|-------|-------|-------|
| 跳动 (mm)<br>Runout            | ≤0.50 | ≤0.35 | ≤0.20 |
| 屈服强度 (Mpa)<br>Yield Strength | ≥200  | ≥320  | ≥550  |

SPREADER ROLLER  
FOR FEEDER MACHINE  
送布机展平辊

产品特点:

广泰T型丝增加了与布草的接触面积，达到快速展开的效果，光洁度、强度、精度优势明显。

Product features:

The T type wire maximizes fabric contact for spreading. It delivers clear advantages in roughness, strength and precision.





ALUMINUM ROLLER  
FOR SPREADING MACHINE  
展布机吸风轴



产品特点:

展布机吸入轴采用铝合金材质加工，强度大，重量轻，适合设备瞬间高速启停运转。


| 辊体规格 Specification | Φ70 Φ80 |
|--------------------|---------|
|--------------------|---------|

Product features:

The aluminum roller has advantages on high strength, light weight . It is suitable for instant high-speed start and stop operation of the equipment.

ROLLER FOR  
IRONING MACHINE

烫平机隔带辊

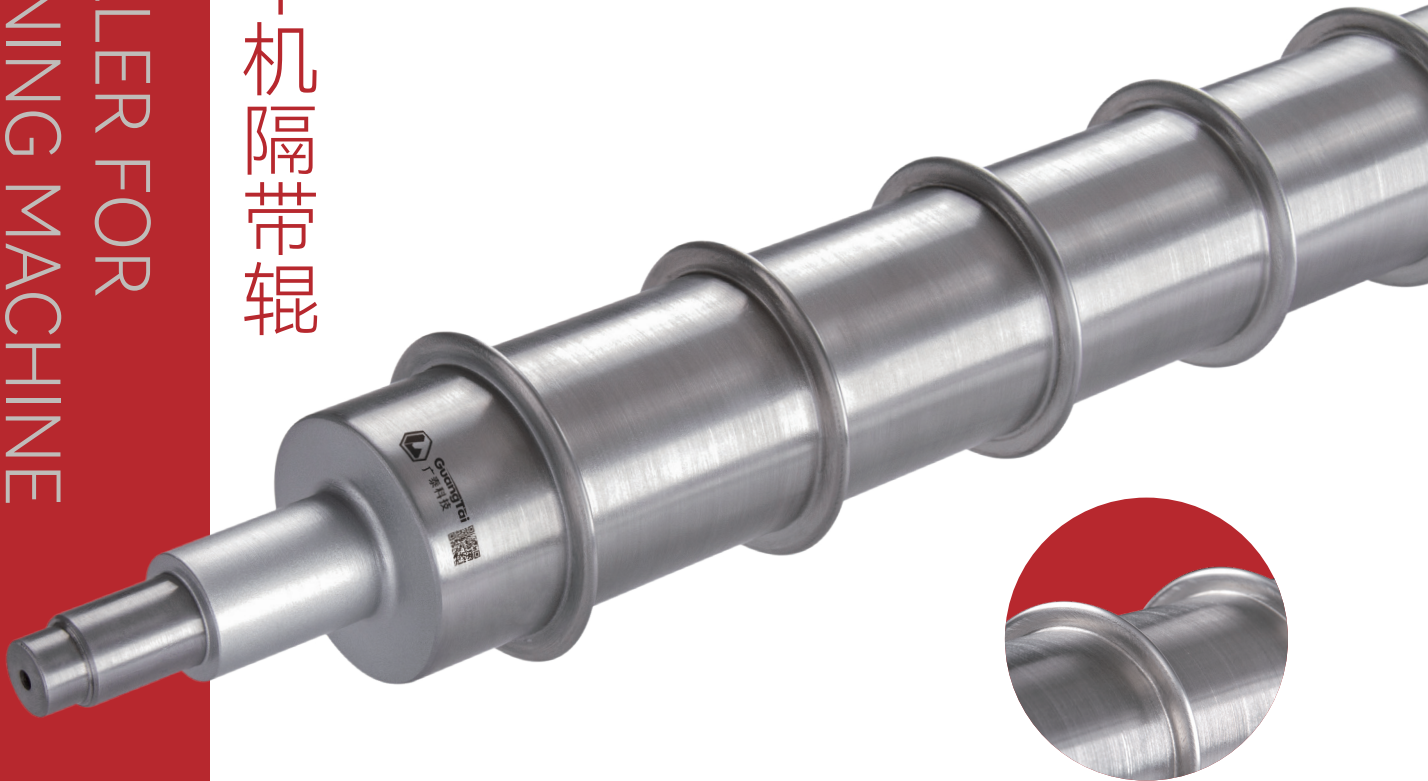

|                   | 公称宽度 (mm)<br>Nominal Width | 等级 Grade | 直径 (mm) Diameter | 跳动 (mm) Runout |
|-------------------|----------------------------|----------|------------------|----------------|
| 技术参数<br>Parameter | 3000/3300                  | P        | Φ90              | ≤0.50          |
|                   |                            | Y        | Φ90 / Φ115       | ≤0.35          |
|                   |                            | G        | Φ90 / Φ115       | ≤0.25          |
|                   | 3600/4000                  | Y        | Φ90 / Φ115       | ≤0.40          |
|                   |                            | G        | Φ102 / Φ115      | ≤0.30          |

产品特点:

- 1、不锈钢辊体及隔片一次成型，整体无焊点，有效保护烫平带。
- 2、一次成型的隔片宽度及弧度，避免了烫平带磨边现象。
- 3、隔片间隔及整体积累公差精度，保证了烫平带的精准定位。
- 4、辊体强度高，保证了所有烫平带的张力一致，受力情况下不变形。
- 5、辊体跳动精度高，保证了烫平带能够平稳运行，更适合高速运转。
- 6、不锈钢辊体及隔片一次成型，耐磨损、耐腐蚀，外观更加美观。

Product features:

- 1.The stainless steel roller and spacers molded in one piece protect the ironing belt effectively.
- 2.The optimized one-piece spacer width and curvature prevent ironing belt abrasion.
- 3.Precise spacer and tolerances ensure accurate positioning of the ironing belt.
- 4.The high strength roller maintains consistent belt tension without deformation under load.
- 5.Minimal roller runout allows high speed operation.
- 6.The one-piece stainless steel construction resists wear and corrosion.



GUANGTAI

ROLLER FOR  
FOLDING MACHINE  
折叠机导带辊

产品特点:

- 1、平衡性能好、转动灵活、稳定性好，光洁度高。
- 2、芯轴、轴承等内部结构采用广泰专用工艺。

Product features:

- 1.Good balance performance, flexible rotation and high surface finish.
- 2.Shaft, bearing and other internal structures adopt Guangtai's special technology.

